


Battery Simulator Quick Start Guide

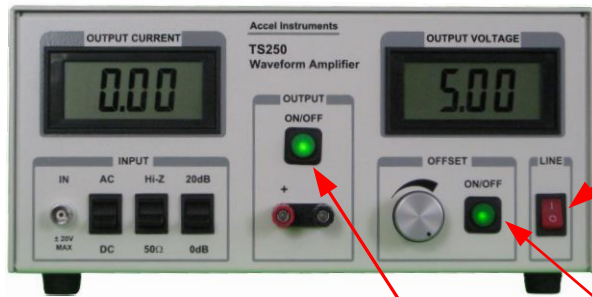


Step 1-A: Plug in the AC power cord (not shown)

Step 1-B: Turn on the TS250 by press the LINE switch

Step 1-C: Enable the offset by press the ON/OFF button

Step 1-D: Enable the OUTPUT by press the ON/OFF button



Average Current

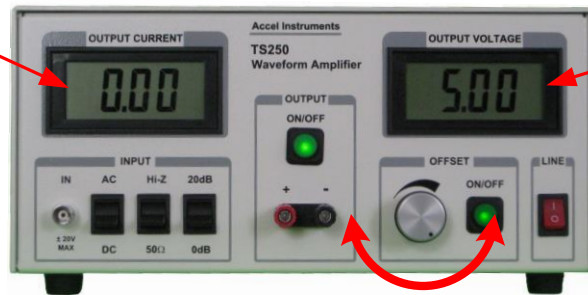

Average Voltage

Step 2: Turn the OFFSET knob to set the simulated battery voltage (e.g. 3.8V)

Step 3-A: Connect the battery charger to the TS250 OUTPUT

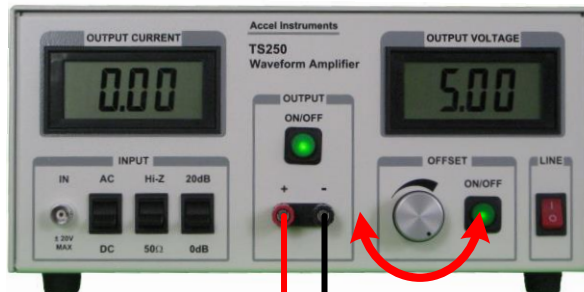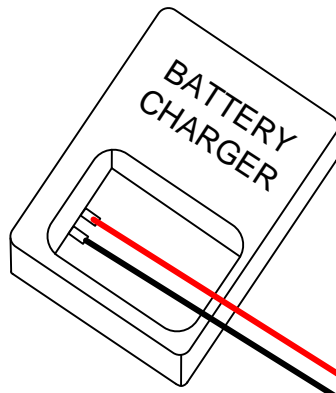

Step 3-B: Vary the voltage to observe the charging current

Visit our website to download additional documents such as datasheet and Application Notes.

<http://www.accelinstruments.com/Download/Download.html>